

SMT-D-4P-EM | MANUAL CONTROL SWITCH

Mounting and operating instructions



Table of contents

SAFETY AND PRECAUTIONS	3
PRODUCT DESCRIPTION	4
ARTICLE CODES	4
INTENDED AREA OF USE	4
TECHNICAL DATA	4
STANDARDS	4
OPERATIONAL CHART	5
WIRING AND CONNECTIONS	5
MOUNTING INSTRUCTIONS IN STEPS	5
VERIFICATION OF INSTALLATION INSTRUCTIONS	7
TRANSPORT AND STORAGE	7
WARRANTY AND RESTRICTIONS	7
MAINTENANCE	7

SAFETY AND PRECAUTIONS



Read all the information, the datasheet, mounting and operating instructions and study the wiring and connection diagram before working with the product. For personal and equipment safety, and for optimum product performance, make sure you entirely understand the contents before installing, using, or maintaining this product.



For safety and licensing (CE) reasons, unauthorised conversion and /or modifications of the product are inadmissible.



The product should not be exposed to abnormal conditions, such as: extreme temperatures, direct sunlight or vibrations. Long-term exposure to chemical vapours in high concentration can affect the product performance. Make sure the work environment is as dry as possible; avoid condensation.



All installations shall comply with local health and safety regulations and local electrical standards and approved codes. This product can only be installed by an engineer or a technician who has expert knowledge of the product and safety precautions.



Avoid contacts with energised electrical parts. Always disconnect the power supply before connecting, servicing or repairing the product.



Always verify that you apply appropriate power supply to the product and use appropriate wire size and characteristics. Make sure that all the screws and nuts are well tightened and fuses (if any) are fitted well.



Recycling of equipment and packaging should be taken into consideration and these should be disposed of in accordance with local and national legislation / regulations.



In case there are any questions that are not answered, please contact your technical support or consult a professional.

PRODUCT DESCRIPTION

The SMT-D-4P-EM is a control switch intended to generate a control signal to regulate the rotational speed of EC motors. The 10 VDC supply voltage is converted into three steps, corresponding to the relevant switch position. Two of the output voltages (switch positions 1 and 2) can be adjusted by build-in trimmers. The enclosure of the switch is splash-proof and suitable for both surface and inset mounting.

ARTICLE CODES

Article code	Power supply	Off position
SMT-D-4P-EM	10 VDC	yes

INTENDED AREA OF USE

- Speed control of EC fans in ventilation systems
- Suitable for kitchens and bathrooms
- For indoor use only

TECHNICAL DATA

- Power supply: 10 VDC
- Output voltage: 0–10 VDC
- Power consumption: < 1 mA
- Rotary knob for manual output voltage adjustment in 3 steps plus OFF-position
- Two trimmers for output voltage adjustment (switch positions 1 and 2)
- Enclosure suitable for tough working environment
- Enclosure:
 - ▶ External: ASA, white-ivory (RAL 9010), IP54
 - ▶ Internal: polyamide, white-ivory (RAL 9010), IP44
- Operating ambient conditions:
 - ▶ temperature: 0–35° C
 - ▶ rel. humidity: < 95 % rH (non-condensing)
 - ▶ Storage temperature: -10–55 °C

STANDARDS

- Low Voltage Directive 2014/35/EC
- WEEE Directive 2012/19/EU
- RoHS Directive 2011/65/EU



OPERATIONAL CHART

SMT-D-4P-EM	
Supply	10 VDC
Position 0	OFF
Position 1	3–7 VDC
Position 2	5–9 VDC
Position 3	10 VDC

WIRING AND CONNECTIONS

10 VDC	+	Supply voltage 10 VDC
	-	Supply voltage, ground
Vout	+	Output voltage 0–10 VDC
	-	Output voltage, ground
Connections		Cable cross section: max. 2,5 mm ²


MOUNTING INSTRUCTIONS IN STEPS

Before you start mounting your SMT-D-4P-EM, read carefully **“Safety and Precautions”** and follow the steps:

For inset mounting


1. Remove the knob by turning it to the right until it pops out.
2. Unscrew the nut and remove the cover of the external enclosure.
3. Do the wiring according to the wiring diagram (see **Fig. 1** *Wiring and connections*).

Fig. 1 Wiring and connections

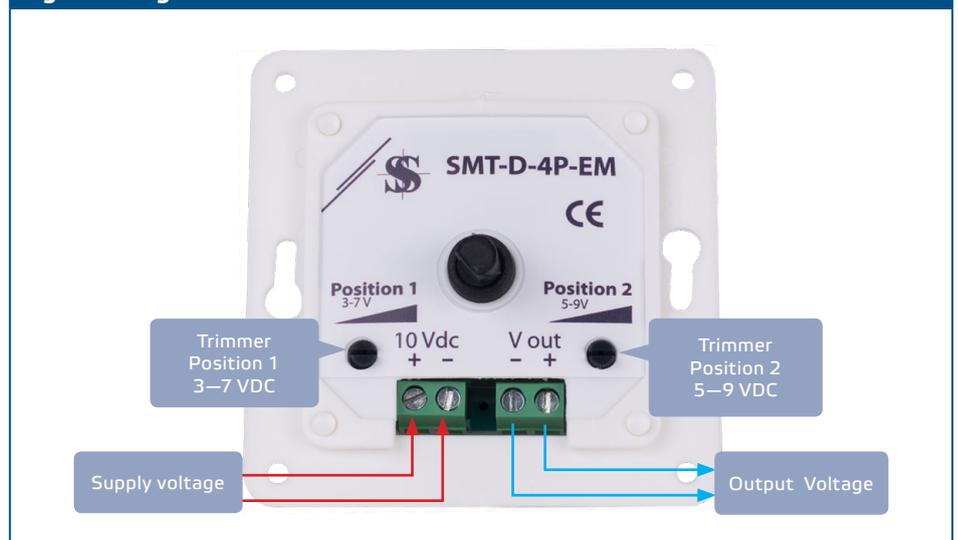

4. Mount the internal enclosure into the wall adhering to the mounting dimensions shown in **Fig. 2** *Mounting dimensions - inset mounting*.

Fig. 2 Mounting dimensions - inset mounting

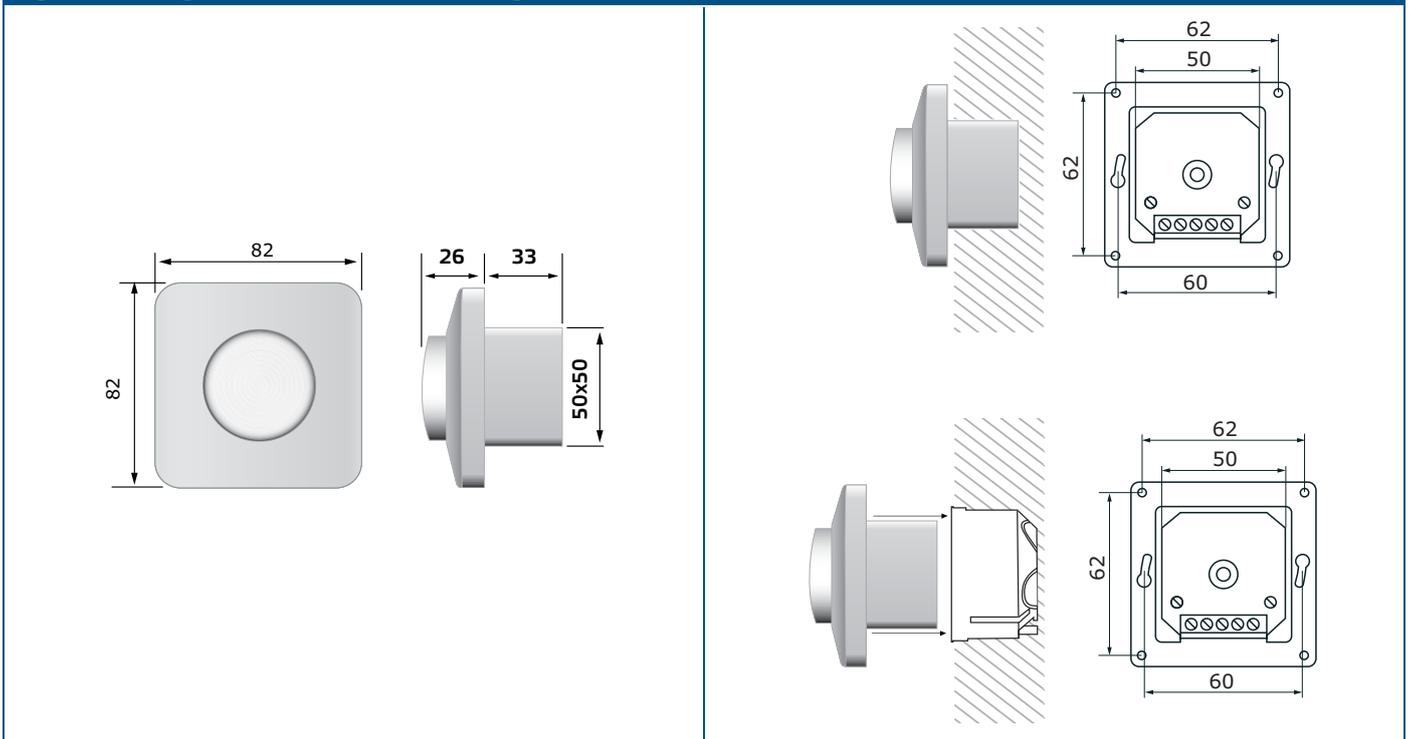

NOTE


Mount the unit so that the terminal block and connections are at the lower side.

5. Adjust the position 1 and 2 output voltage trimmers using a flat screwdriver. See **Fig. 4**.
6. Mount back the cover and secure it with the nut.
7. Put back the knob and turn it to position "0".
8. Turn on the power supply.


For surface mounting

1. Remove the knob by turning it to the right until it pops out.
2. Unscrew the nut and remove the cover of the external enclosure.
3. Mount the external enclosure onto the surface by means of screws and dowels (not included in the set) adhering to the mounting dimensions shown in **Fig. 3** *Mounting dimensions - surface mounting*.

Fig. 3 Mounting dimensions - surface mounting

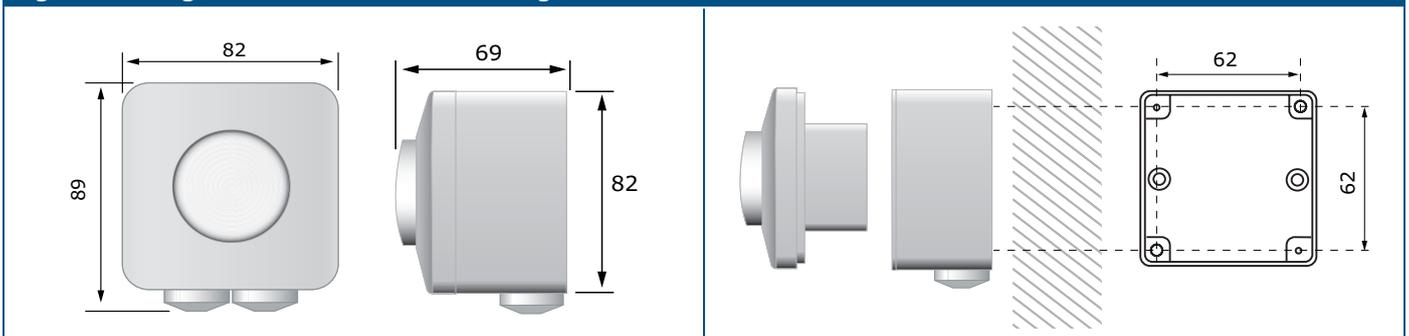

4. Insert the cables through the grommets..
5. Insert the internal enclosure into the external one and fix it using the screws and washers included in the set.
6. Do the wiring according to the wiring diagram (see **Fig. 1** *Wiring and connections*)
7. Adjust the position 1 and 2 output voltage trimmers using a flat screwdriver. See **Fig. 4**.

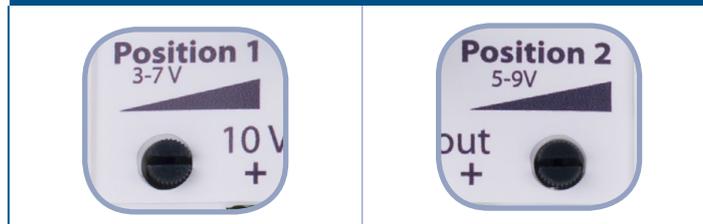Fig. 4 Trimmers**NOTE**

Mount the unit so that the terminal block and connections are at the lower side.

8. Mount back the cover and secure it with the nut.
9. Put back the knob and turn it to position "0".
10. Turn on the power supply.

VERIFICATION OF INSTALLATION INSTRUCTIONS

**ATTENTION**

Use only tools and equipment with non-conducting handles when working on electrical devices.

- In case of faulty operation, please check if:
 - ▶ the right voltage is applied;
 - ▶ all connections are correct;
 - ▶ the regulated device is functioning.

TRANSPORT AND STORAGE

Avoid shocks and extreme conditions; stock in original packing.

WARRANTY AND RESTRICTIONS

Two years from the delivery date against defects in manufacturing. Any modifications or alterations to the product after the date of publication relieve the manufacturer of any responsibilities. The manufacturer bears no responsibility for any misprints or mistakes in this data.

MAINTENANCE

In normal conditions this product is maintenance-free. If soiled, clean with a dry or damp cloth. In case of heavy pollution, clean with a non-aggressive product. In these circumstances the unit should be disconnected from the supply. Pay attention that no fluids enter the unit. Only reconnect it to the supply when it is completely dry.