



# MDB-M/6

## PoM distribution box, 6 channels

MDB-M/6 is a compact PoM distribution box. It is compatible with sensors, sensor controllers, HVAC controllers and fan speed controllers with Modbus RTU on board and suitable for long-distance power and data distribution between connected units.

### Key features

- RJ45 connectors for Power over Modbus (both Modbus RTU and 24 VDC are distributed via the RJ45 connector)
- No software or configuration required
- Easy to connect
- Surface mountable
- Power supply green LED indication on RJ45 sockets
- Reliable connection for permanent installations

### Technical specifications

Supply voltage	24 VDC (Power over Modbus)	
Total I/O current rating	Imax 1,5 A	
Protection class	IP65	
Ambient conditions	Temperature	-30—70 °C
	Relative humidity	20—90 % rH, non-condensing
Enclosure	ABS plastic, colour: grey (RAL7035)	
Maximum total cabling length	100 m	

### Wiring and connections

J1—J6	RJ45 sockets for PoM connections	
RJ45 cable		
Pin 1	24 VDC	Supply voltage
Pin 2	24 VDC	Supply voltage
Pin 3	A	Modbus RTU communication, signal A
Pin 4	A	Modbus RTU communication, signal A
Pin 5	/B	Modbus RTU communication, signal /B
Pin 6	/B	Modbus RTU communication, signal /B
Pin 7	GND	Ground, supply voltage
Pin 8	GND	Ground, supply voltage

**Note:** The maximum power supply per channel must not exceed 1,5 A.

### Standards


- Low Voltage Directive 2014/35/EC  
- EN 60664-1:2007
- EMC Directive 2014/30/EC  
- EN 55022:2010  
- EN 55024:2010  
- EN 61000-3-2:2014  
- EN 61000-3-3:2013
- RoHS Directive 2011/65/EC



### Area of use


Modbus RTU compatible units

### Packaging



Article	Packaging	Length [mm]	Width [mm]	Height [mm]	Net weight	Gross weight
MDB-M-6	Unit (1 pc.)	154	114	44	133 g	153 g
	Box (45 pcs.)	590	380	280	5,985 kg	7,745 kg



### Fixing and dimensions

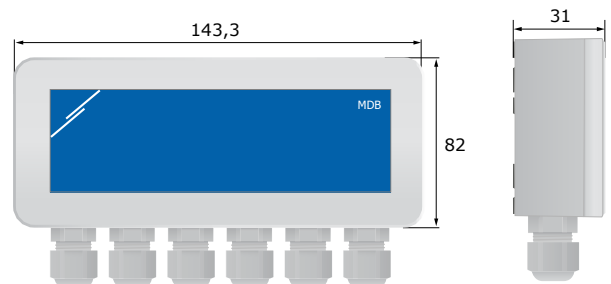



# MDB-M/6

PoM distribution box, 6 channels

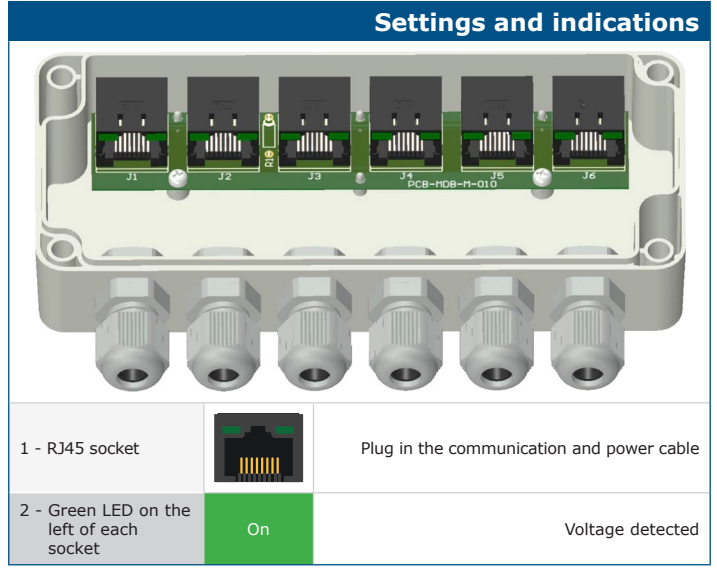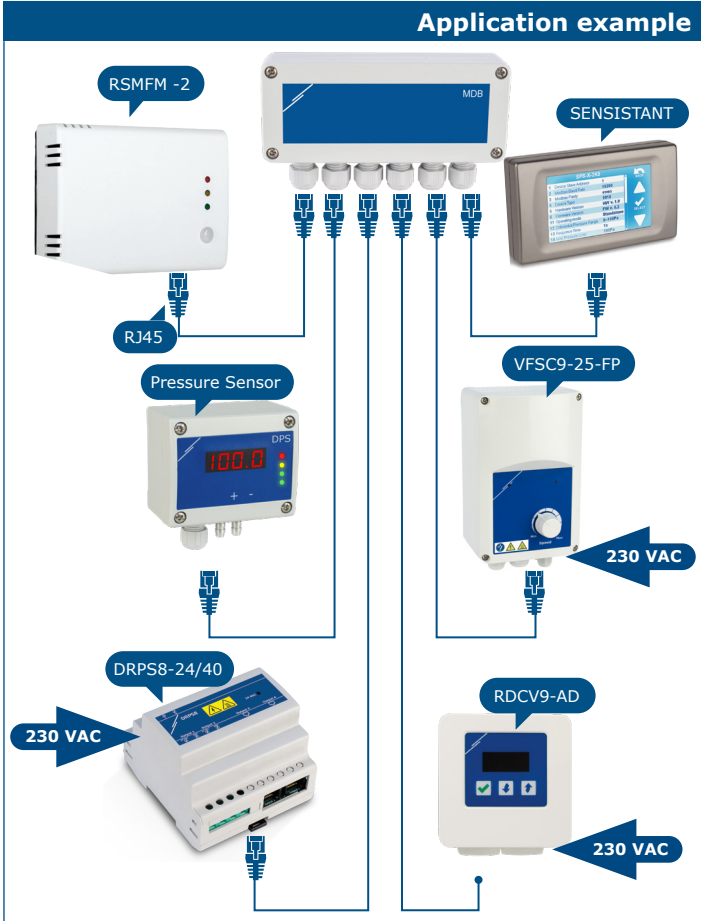

### Global trade item numbers (GTIN)

Packaging	MDB-M-6
<b>Unit</b>	05401003008669
<b>Box</b>	05401003502013