


W-STC-1-L25

230 VAC autotransformer with solder tags

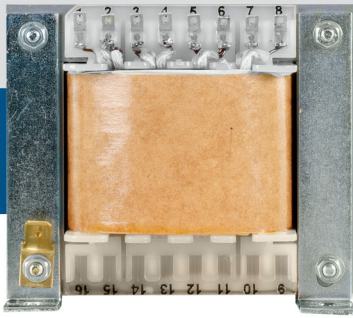

The W-STC-1 series of autotransformers consists of compact transformers designed for switchboard mounting or applications requiring output voltages lower than the input voltage. They reduce the primary voltage in steps.

Key features

- Wide power range: 1,5–13 A
- Six output voltages available at the secondary side
- Resin encapsulated
- Primary / input voltage: 230 VAC ±10 % / 50–60 Hz
- Simple switchboard mounting thanks to robust mounting brackets
- Good corrosion protection

Technical specifications

Input voltage	230 VAC ±10 %	
Frequency	50–60 Hz	
Dielectric sensitivity	2.500 VAC	
Protection standard	IP20 (according to EN 60529)	
Ambient conditions	Temperature	max. 40 °C
	Rel. humidity	< 90 % rH (non-condensing)

Area of use

- Fan speed control in steps
- Suitable for installation in electrical cabinets or switchboards

Article codes


Article code	Rated max. current [A]
W-STC-1-15L25	1,5 A
W-STC-1-25L25	2,5 A
W-STC-1-35L25	3,5 A
W-STC-1-50L25	5 A
W-STC-1-75L25	7,5 A
W-STC-1-100L25	10 A
W-STC-1-130L25	13 A

Voltage taps

VAC	0	80	100	120	150	170	190	230
-----	---	----	-----	-----	-----	-----	-----	-----

Global trade item numbers (GTIN)

Article	Unit
W-STC-1-15L25	05401003014998
W-STC-1-25L25	05401003015025
W-STC-1-35L25	05401003015063
W-STC-1-50L25	05401003015100
W-STC-1-75L25	05401003015148
W-STC-1-100L25	05401003015186
W-STC-1-130L25	05401003015223

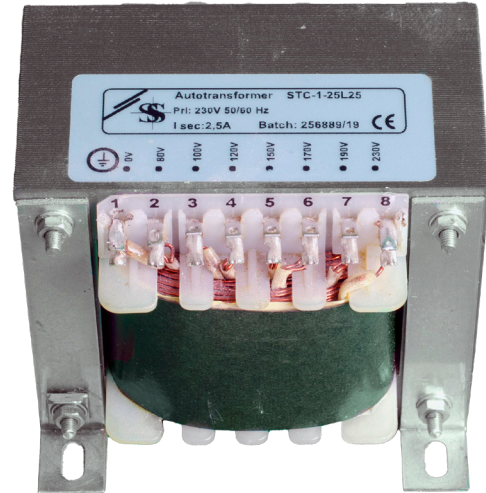

Wiring and connections

L	Primary voltage, line (230 VAC / 50–60 Hz)
N	Primary voltage, neutral
Pe	Earth terminal

Standards

- Low Voltage Directive 2014/35/EU
 - EN 60529; EN IEC 61558-1;
 - EN 61558-2-13
- EMC directive 2014/30/EU
- RoHS Directive 2011/65/EU - EN IEC 63000:2018



Wiring diagram

