




DRPS8-24-40




DIG-M-2*



SPR-M-3-BK



OCTHM-R



SPR-M-3-BK



ADPT-3SM-FI






FlxE13xxxEx



AC fan - induction motor with TK

3 phase Motor

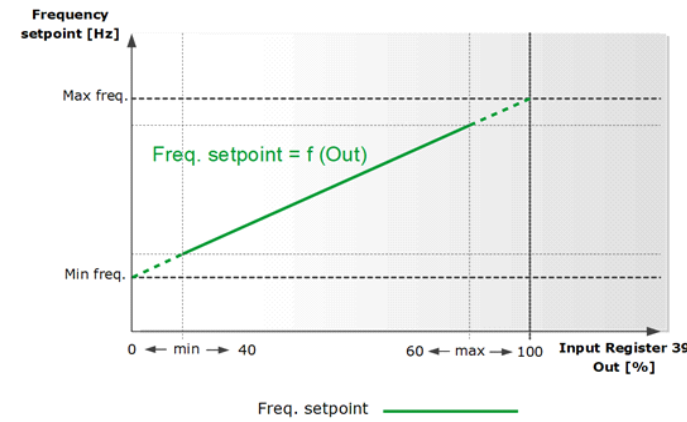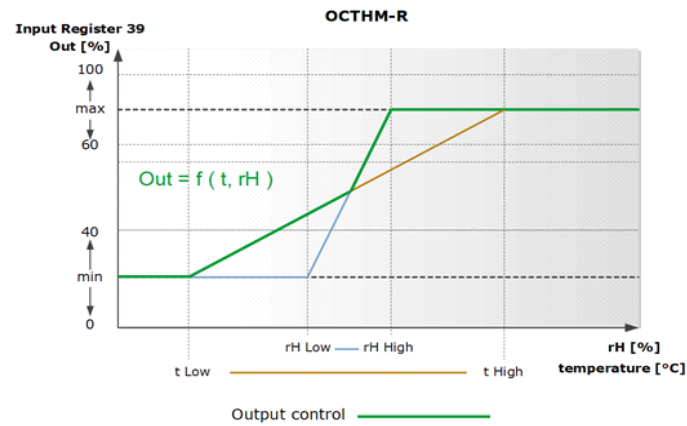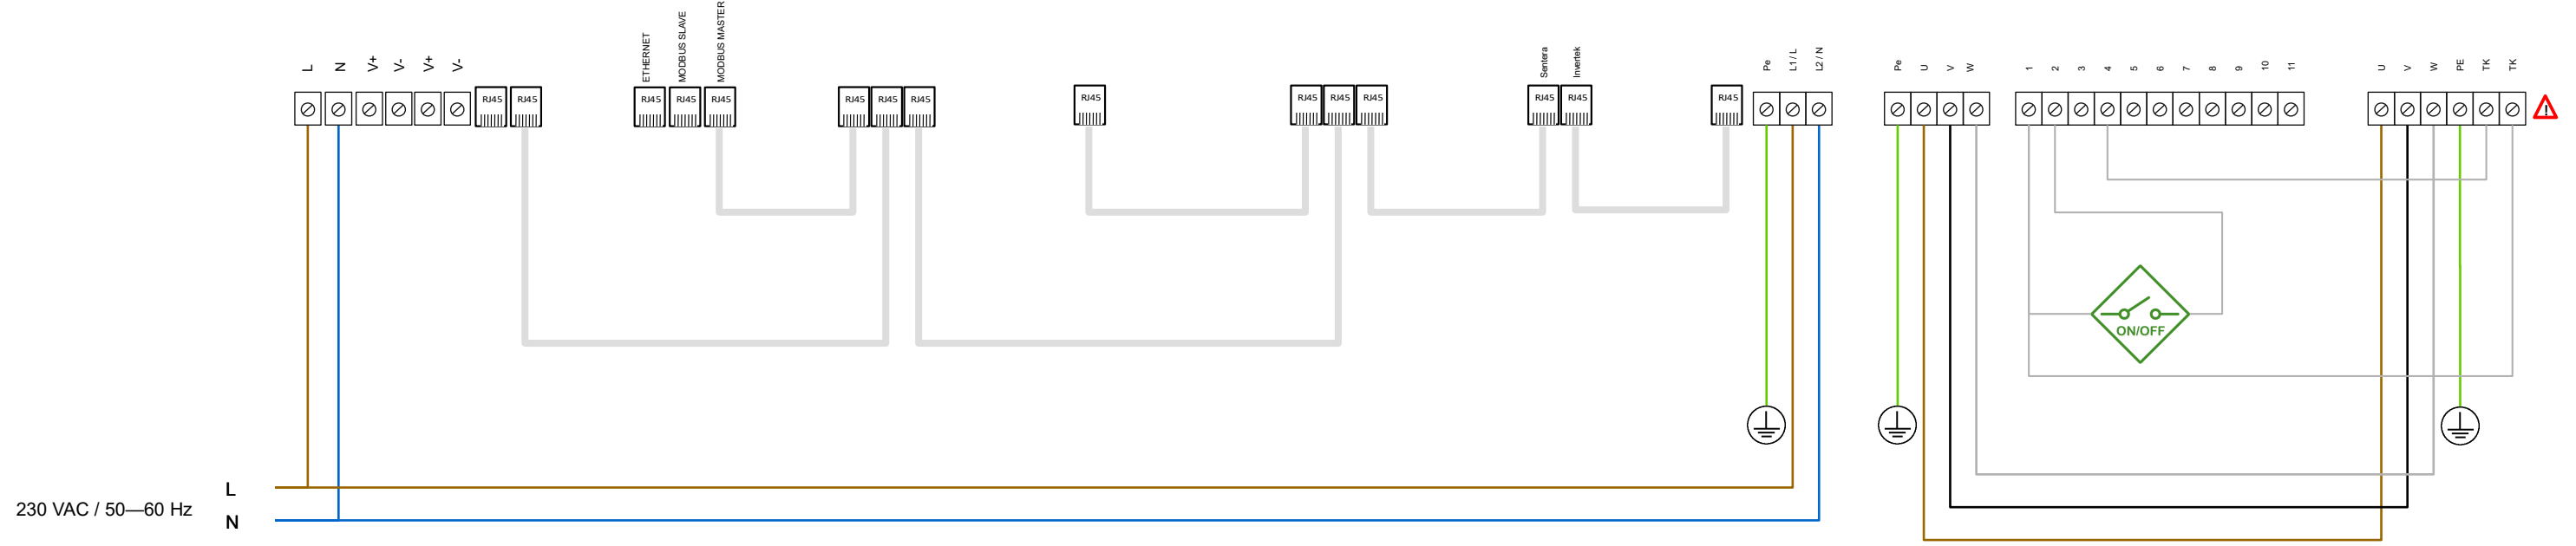

⚠ Consult the fan manufacturer for the correct wiring.

Sentera products		External products		Parameters settings			
Article codes	Description			Article codes	Parameters	Values	Descriptions
OCTHM-R FlxE13xxxEx DIG-M-2* DRPS8-24-40 ADPT-3SM-FI SPR-M-3-BK	Intelligent multifunctional outdoor sensor (T, rH) Frequency inverter 1 ph to 3 ph 230VAC Sentera Internet Gateway, din-rail* Power Supply 24 V / 40 VA / 1,8 A, din-rail RJ45-to-RJ45 adapter 3-RJ45 splitter *Can be disconnected for standalone solution; when changes to solution are needed, gateway needs to be connected again.	230 VAC 3 ph AC induction motor with TK (normal closed) One on/off switch Standard network UTP cables Cat5E or higher		FlxE13xxxEx	P12 P14 P15 P30 = HR158 P01 = HR129, P02 = HR130, P07 = HR135, P08 = HR136, P09 = HR137	3 or 4 201 3 Auto 0 Motor parameters	Primary command source Extended menu access mode Digital input function select Start mode, automatic restart Motor parameters